

Attachment A: Digital Images

Page 1 of 5

April 29th, 2008

BOE Building 1st Floor Security Kiosk Area
Sacramento, CA




- 1) Image of security area kiosk station ceiling with interim containments in place at time of assessment of BOE Building (Subject Building) located at 450 N Street, Sacramento.



- 2) Image of inspector entering ceiling plenum space through access panel. Note presence of plastic containment barriers over impacted materials at time of inspection.



- 3) Image of HVAC plumbing with indications of moisture staining present on insulation materials located above the impacted areas.

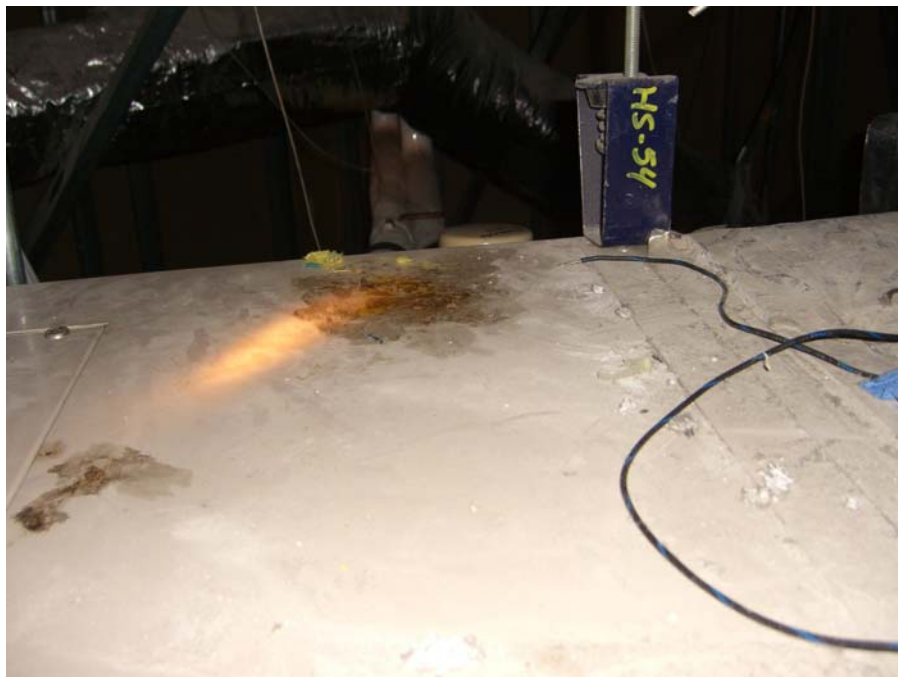

- 4) Image of stained sheetrock material associated with chronic moisture release from HVAC systems.



- 5) Image of inspector walking on plywood “cat walk” boards previously installed on ceiling joist structures within ceiling cavity.



- 6) Additional image of plastic barriers which were opened to gain access for inspection and sampling of affected materials.



- 7) Close-up image of stained materials within ceiling materials of bay directly beneath HVAC system. Samples B01 and S01 collected from such materials.



- 8) Image of physical dripping from corner of condensate pan located under HVAC system apparatus.



9) Image of adjacent bay cavity where Sample S02 was collected within impacted area.



10) Image within ceiling plenum area away from impacted materials where surface control sample S06 was collected from horizontal surface in north corner of space.